





Section A-A



Section B-B

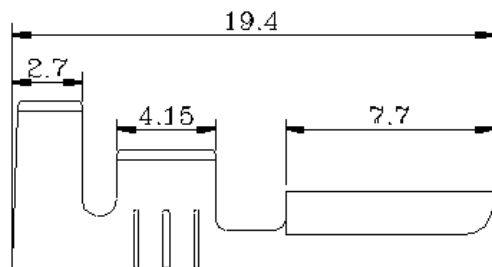

Section C-C



0.8±0.02

Specifications & Ordering Information:

| Part No | Thickness | Material | Wire Range | Insulation O.D. | Finish | Qty/reel | Mating Tab | Males With |
|----------|-----------|----------|------------|-----------------|-------------------|----------|-------------|---------------------|
| 2225BS-0 | 0.4 | Brass | AWG #10~12 | 5.1-3.9 mm | None | 5,000PCS | 6.35×0.8 mm | 2306BS 2324BS 231- |
| 2225BS-1 | 0.4 | Brass | AWG #10~12 | 5.1-3.9 mm | Chemical Grinding | 5,000PCS | 6.35×0.8 mm | 2306BS 2312BL 231- |
| 2225BS-2 | 0.4 | Brass | AWG #10~12 | 5.1-3.9 mm | Tin-Plated | 5,000PCS | 6.35×0.8 mm | 2304BS Terminals |

| REV. | DATE | REV. | DATE |
|------|-----------|------|------|
| A | 2.10.1999 | | |

HO CHIEN
www.hochien.com

| UNIT : mm | APPROVAL | CHECKED | DRAWING | PRODUCT |
|--|----------|---------|---------|---------|
| TOLERANCE : .000 : ±0.08 .00 : ±0.13 .0 : ±0.25 | | | | 2225 |