





Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0 P.B.T
 All materials must be GP materials


RoHS Compliant

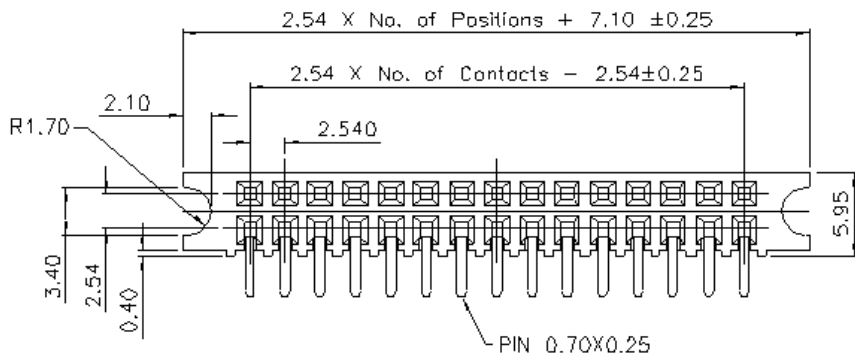

2600 - [] X [] [] G - B
 1:1 Row 1 thru 40 pins G:Gold B Type
 2:2 Row Per Row

Recommended P.C.Board

Hole Layout



<p>HO CHIEN www.hochien.com</p>				<p>GENERAL TOLERANCE</p> <table border="1"> <tr> <td>Y. ± 5"</td> <td>X. ±</td> </tr> <tr> <td>X. ± 2"</td> <td>X. ± 0.38</td> </tr> <tr> <td>XX ± 1"</td> <td>XX ± 0.25</td> </tr> <tr> <td>XXX ± 0</td> <td>XXX ± 0.13</td> </tr> </table>		Y. ± 5"	X. ±	X. ± 2"	X. ± 0.38	XX ± 1"	XX ± 0.25	XXX ± 0	XXX ± 0.13	<p>DRAWN XIAO PING</p>		<p>DATE 09-07-04'</p>		<p>DWG. NO. 2600-2X_G-B</p>		<p>TITLE 2.54 FEMALE HEADER DUAL ROWS DIP TYPE SIDE ENTRY</p>	
Y. ± 5"	X. ±																				
X. ± 2"	X. ± 0.38																				
XX ± 1"	XX ± 0.25																				
XXX ± 0	XXX ± 0.13																				
<p>REV. 01 UNIT mm SCALE 3=1</p>				<p>CHECK</p>		<p>DATE</p>		<p>PART NO. 2600-2X_G-B</p>													
				<p>APPROVE</p>		<p>DATE</p>															