


4002, 4012-3396 Series DIN41612 C Type Female

HO CHIEN

www.hochien.com

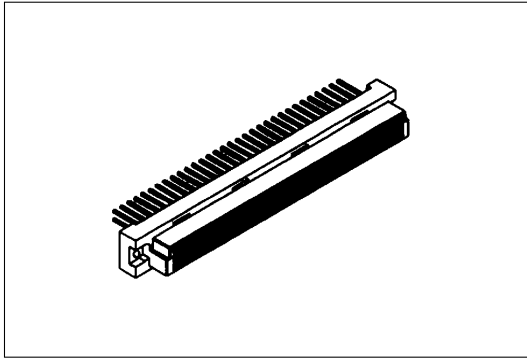

Material:







Housing: 30% Glass filled PBT UL94V-0.
Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩmin. at DC 500V.
Contact Resistance: 30mΩmax. at DC 100mA.
Operating Temperature: -55°C ~ +105°C.

Features:

- * UL, cUL listing.
- * Mates with Male 3Row

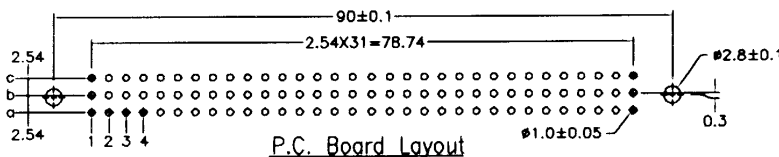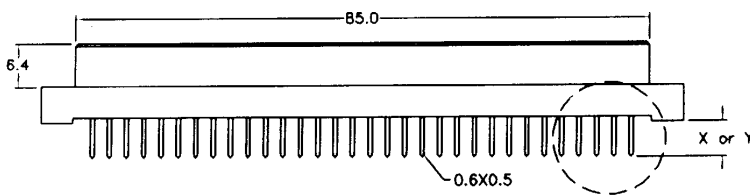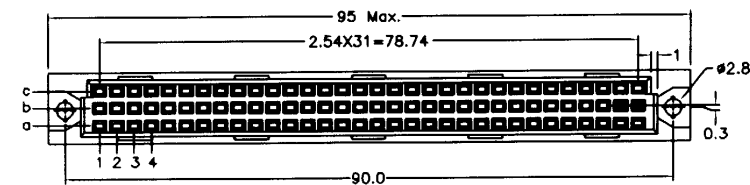

Part Number	Pitch	Position	Rows with Contacts	Contact Arrange	length			
					X	Y	W1	W2
4002-3396	2.54mm	96	a b c		4.0	2.5	13	17
4002-2264		64	a b -		4.6	6.3	13	17
4002-3264		64	a - c					
4002-3232		32	a - c					
4012-3348	5.08mm	48	a b c					
4012-2232		32	a b -					
4012-3232		32	a - c					
4012-3216		16	a - c					

Product Coding

4000-3396
4010-3396

See table

4002-3396 : 2.54mm
4012-3396 : 5.08mm
male 96 Position

1
Blank: 4.0mm
2: Dip Length
W1: Dip Length
W2: Dip Length

C
C: Dip Tin
Contact Gold
G: Gold

00
Blank: G/F
10: 10 μ"
15: 15 μ"
30: 30 μ"

P
Blank: Dip
P: Press Fit

L1
Blank: W/O Lock
L1: With Lock

*Standard Gold Flash.

*32, 64 Pin Standard a - c Row.