
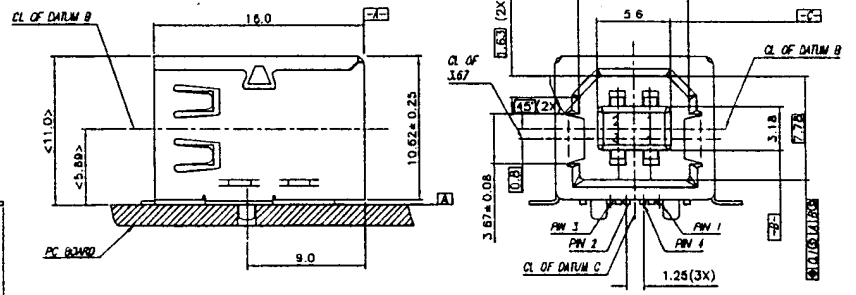

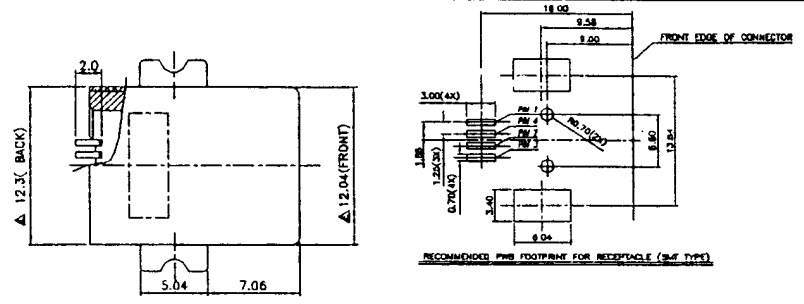


REVISION	DESCRIPTION	DATE	APPD
0	SETUP	4/5/98	C Y

Product Code

USB B 4 F 03 01 W 05
 (1) (2) (3) (4) (5) (6) (7)

- (1) Type: B
- (2) No. of Contact: 4 Positions
- (3) F: Socket
- (4) 03: SMT
- (5) 01: Right Angle
- (6) Color of Insulation: W White, K Black
- (7) Plating of Contact: 05: 5u" Gold,
30: 30u" Gold....



NOTE I

MATERIAL

Pin Contact: Brass
 Contact Plating: Selective 0.000127mm [.000005"] Gold min on contact end and 0.00381mm [.000150"] Tin on tail end all over .00127mm [.00005"] nickel
 Insulation material: PBT UL 94-V0
 Shell Finish: Nickel
 Color: White / Black

NOTE II

ELECTRICAL PERFORMANCE

Current Rating: 1 amp
 Dielectric Strength: 750 Vac sea level
 Insulator resistance: 1000 Megohms Min DC 500V
 Contact resistance: 30 Milliohms Max
 Capacitance: 2 pF max.
 Temperature: -55°C to +105°C

MATERIAL	SEE NOTE I	OR Jececa Yang	HO CHIEN ENTERPRISE CO. LTD.
		CHK Z T Chen	
ELECTRICAL PERFORMANCE	SEE NOTE II	APPD C Y Lin	UNIVERSAL SERIAL BUS CONNECTOR; TYPE B; SOCKET; RIGHT ANGLE SMT TYPE
		APPD	
UNIT mm	SCALE	WEIGHT	PAGE 1 OF 1
			HO CHIEN PIN NO. USBB4F0301W00

THIS DRAWING IS A CONTROLLED DOCUMENT OF HO CHIEN ENTERPRISE CO. LTD. IT IS SUBJECT TO CHANGE