




Specifications
 Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max
 Operating Temperature: -40°C to +105°C


Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

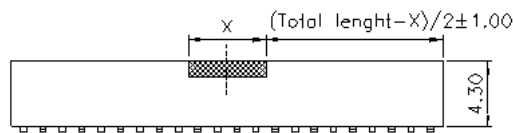

RECOMMENDED P.C.B LAYOUT



Ordering Information

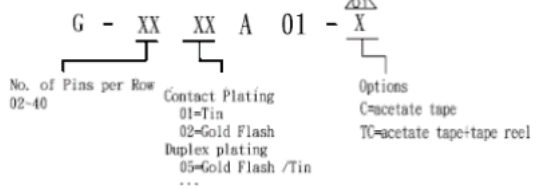

X	NOTE
5mm	02~25pins
10mm	26~40pins

HO CHIEN www.hochien.com				GENERAL TOLERANCE X* ± 5' X ± X* ± 2' X ± 0.38 .XX* ± 1' .XX ± 0.25 .XXX* ± 0.5' .XXX ± 0.13		DESIGN: PI HONG BIN DATE: 01-26-06'		DWC. NO. G SEC102-A01		TITLE: 1.27 FEMALE HEADE SINGLE ROW SMT TYP BASF 4.30H	
REV.	02	UNIT. mm	SCALE. 3:1	CHECKED: AUDITED: APPROVED:		DATE: DATE: DATE:		PART NO. G SEC102-XX XX A 01 - X		02	