

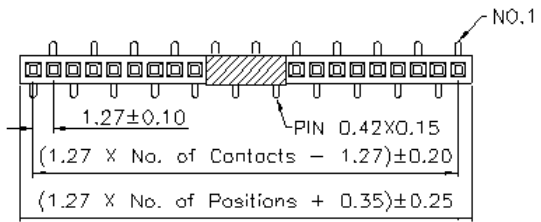


REV.	LOCAS.	DESCRIPTION	DATE	DRA
02	△	Add the acetate tape specifications	2006.03.15	HC




Specifications  
 Current Rating: 1Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 300V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

Materials  
 Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon 6T  
 All materials must be GP materials

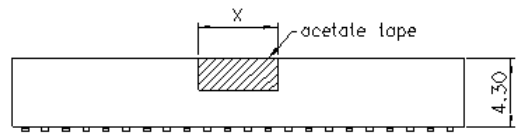


### Ordering Information

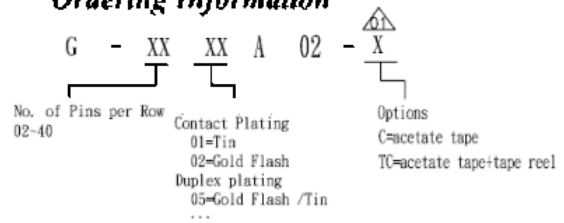

### RECOMMENDED P.C.B LAYOUT

X	NOTE
5mm	02~25pins
10mm	26~40pins



REV. 02	UNIT. mm	SCALE. 1:1		<b>HO CHIEN</b> <a href="http://www.hochien.com">www.hochien.com</a>		<b>GENERAL TOLERANCE</b> X* ± 5° X ± 0.30 .X* ± 2° .X ± 0.20 .XX* ± 1° .XY ± 0.15 .XXX* ± 0.5° .YYY ± 0.10		DESIGN: 皮法斌 CHECKED: AUDITED: APPROVED:	DATE: 2006.03.15 DATE: DATE:	DWC. NO. G SEC102-A02	<b>TITLE.</b> 1.27 FEMALE HEADE SINGLE ROW SMT TYP BASE 4.30H
				<b>PART NO.</b> G SEC102-XX XX A 02 - X							