


SPECIFICATIONS



BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0).BLACK
TERMINALS: TIN PLATED BRASS
SCREW: NICKEL PLATED STEEL
WIRE RANGE: 14-22 STR
RATING: 10 AMPERES. 250 VAC
INSULATION WITHSTANDS VOLTAGE AC 2000V
INSULATION RESISTANCE 500M OR MORE AT DC 500V



Part Number: HB-951-□P-□

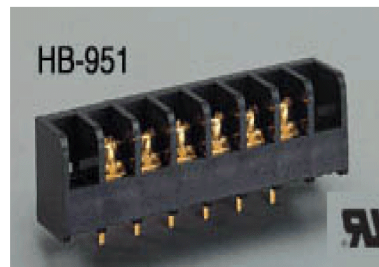

S:Plate
 Pole Size 2~32P

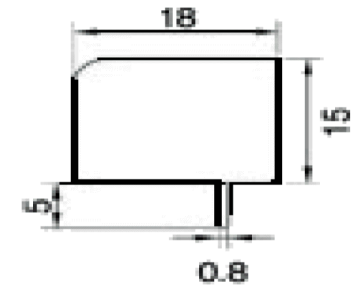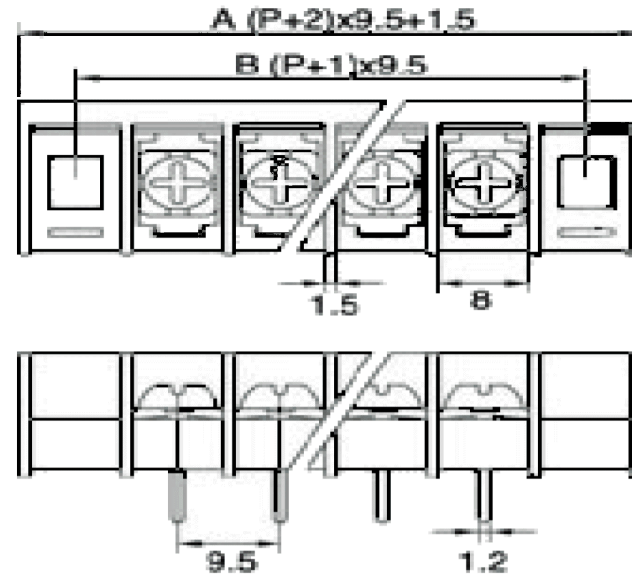

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
A	20.5	30	39.5	49	58.5	68	77.5	87	96.5	106	115.5	125	134.5	144			
B	9.5	19	28.5	38	47.5	57	66.5	76	85.5	95	104.5	114	123.5	133			
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A	153.5	163	172.5	182	191.5	201	210.5	220	229.5	239	248.5	258	267.5	277	286.5	296	305.5
B	142.5	152	161.5	171	180.5	190	199.5	209	218.5	228	237.5	247	256.5	266	275.5	285	294.5

HO CHIEN
www.hochien.com