

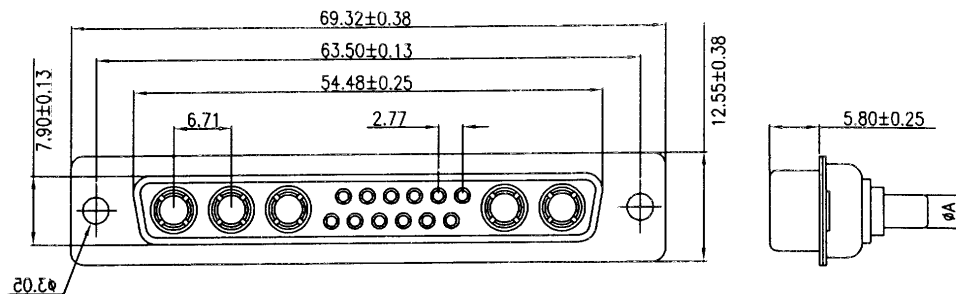


REVISION	DESCREPTION	DATE	APPD
0	SET UP	APR/20/2005	C.Y.LIN

Top View

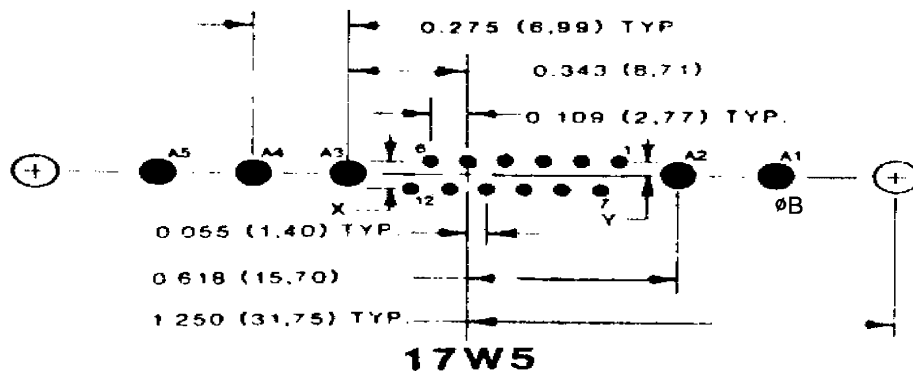

PART NO.	Current Rating	Dimension	Dimension
		ØA	ØB
1641-15T	40 AMPS	Ø3.75	Ø4.20
1621-15T	20 AMPS	Ø2.8	Ø3.28
1611-15T	10 AMPS	Ø1.7	Ø2.20

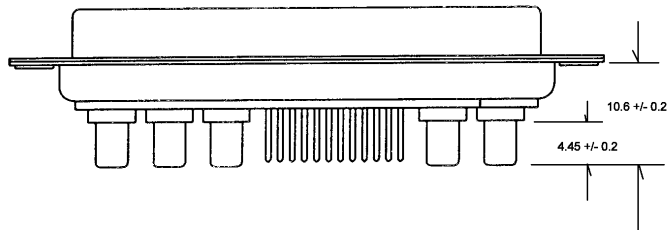

PCB LAYOUT

### MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED  
 CONNECTOR INSULATOR : PBT THERMOPLASTIC,  
 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR  
 SIGNAL CONTACT MATERIAL: BRASS, FULL GOLD FLASH  
 HIGH POWER CONTACT MATERIAL: BRASS, 15u" GOLD PLATED

### ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,OR40 AMPS

DIELECTRIC WITHSTANDING VOLTAGE :  
 1000 V AC FOR 1 MINUTE  
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.  
 TEMPERATURE RATING : -55°C ~ +125°C

Dimension ( mm )



HO CHIEN ENTERPRISE CO. LTD

TITLE D-SUB CONNECTOR 17W5 Female  
 ( Power Contact Straight DIP Type )

DR : RON CHEN	CHK : J.T,CHEN	APPD : C.Y.LIN	PAGE : 1 OF 2	HO CHIEN P/N. 1621-15T
------------------	-------------------	-------------------	------------------	---------------------------