


REVISION	DESCRIPTION	DATE	APPD
0	SET UP	MAR/17/2000	C.Y.LIN

2524-1X □□G7.6

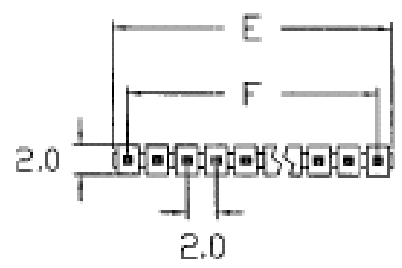


2524 - 1 x □□□□

NO. OF CONTACT 2 ~ 40 pos

CONTACT PLATING
 G=Gold plated
 T=Tin plated

PIN LENGTH
 * Black color only

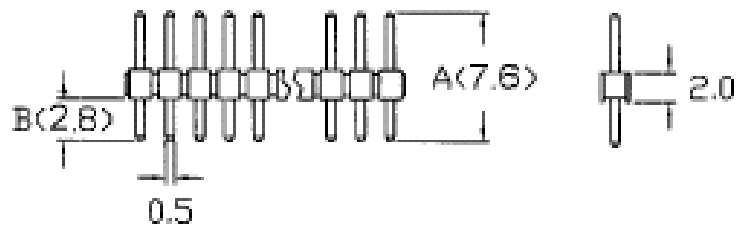

P.C.B. Board Layout

Dimension (mm)	2 to 40 pos, avail, per row
Tolerance : ± 0.2	
E	2.00 x No. of position per Row
F	2.00 x No. of position per Row - 2.00

MATERIAL & ELECTRICAL
 INSULATOR : P.B.T. +30% Glass fiber UL 94-V0
 CONTACT : Brass
 CURRENT RATING : 1 Amp
 CONTACT RESISTANCE : 20mΩ Max. at 100mA DC
 INSULATOR RESISTANCE : 500MΩ Min. at 500V DC
 TEMPERATURE : -55°C ~ +105°C

UNIT : mm
 TOLERANCE : ± 0.2

 **HO CHIEN ENTERPRISE CO. LTD**

TITLE :
 0.078" (2.00mm) PIN HEADER STRAIGHT

DR: RON CHEN	CHK: J.T.CHEN	APPD: C.Y.LIN
--------------	---------------	---------------

HO CHIEN PIN NO.	2524-1X □□G7.6-2.8
------------------	--------------------