
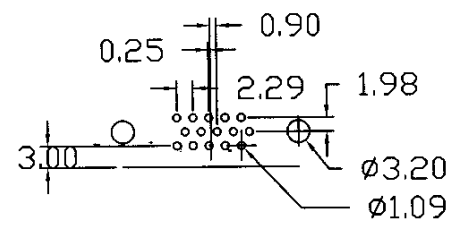

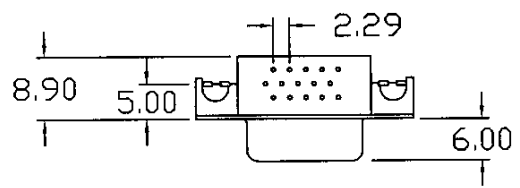


REVISION	DESCREPTION	DATE	APPD
0	SET UP	JAN/10/2001	C.Y.LIN

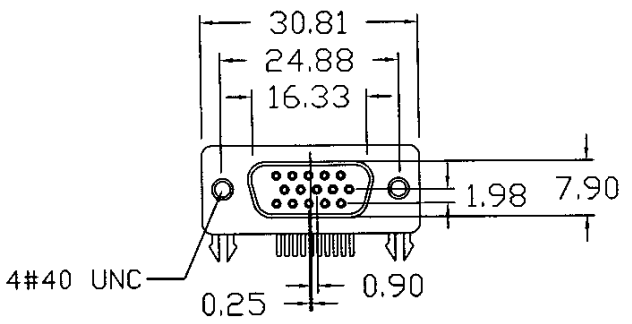


P.C.B. Layout

MATERIAL & ELECTRICAL
 SHELL : Steel Tin plated
 INSULATOR : PBT & Glass-fibre UL 94-V0
 CONTACT : Phosphor bronze
 PLATING : Gold-Plated Over Nickel
 CURRENT RATING : 5 Amp
 DIELECTRIC STRENGTH : 1000V for one minute.
 INSULATOR RESISANCE : 1000M Ω Min. at 500V DC.
 TEMPERATURE : -55°C ~ +105°C
 COLOR : (Black), Blue

UNIT : mm
 TOLERANCE ± 0.15

DR. RON CHEN	CHK. J.T.CHEN	APPD. C.Y.LIN
--------------	---------------	---------------

 HO CHIEN ENTERPRISE CO. LTD		
TITLE : HIGH DENSITY D - SUB RIGHT ANGLE CONNECTOR		
PAGE: 1 OF 1	HO CHIEN P/O NO. 3314 - HD15	