
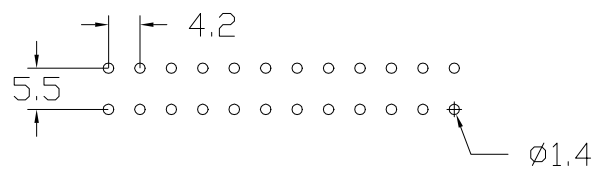
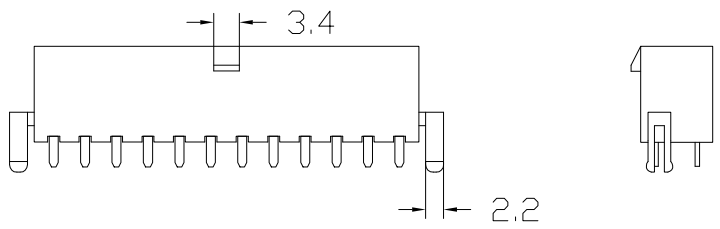
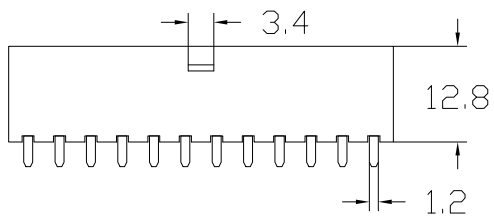

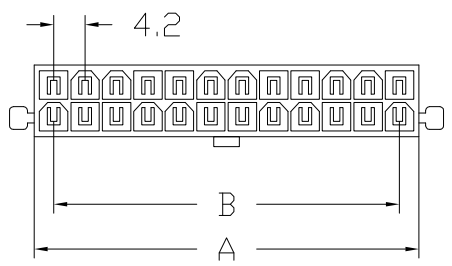




| REVISION | DESCREPTION | DATE        | APPD    |
|----------|-------------|-------------|---------|
| 0        | SET UP      | MAR/17/2000 | C.Y.LIN |

4201S

4201SA

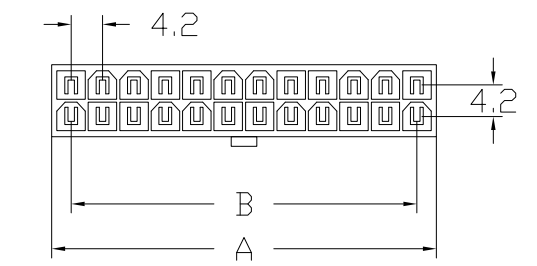

P.C. Board Layout

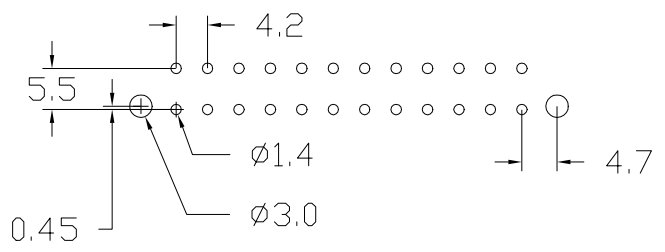

P.C. Board Layout

MATERIAL  
 INSULATOR : Nylon 6T UL 94-V2  
 CONTACT : Brass  
 PLATING : Tin plated

| Dimension ( mm )                                  |                                     |
|---|-------------------------------------|
| Tolerance : ±0.2      2 to 24 pos. avail. per row |                                     |
| A   | 4.2 x No. of position per Row       |
| B   | 4.2 x No. of position per Row - 5.4 |



TITLE :  
 4.20mm(.165") MINI-FIT POWER CONNECTOR

|                  |                   |                   |
|------------------|-------------------|-------------------|
| DR :<br>RON CHEN | CHK :<br>J.T,CHEN | APPD :<br>C.Y.LIN |
|------------------|-------------------|-------------------|

|                 |                                    |
|-----------------|------------------------------------|
| PAGE:<br>1 OF 1 | HO CHIEN PIN NO.<br>4201S & 4201SA |
|-----------------|------------------------------------|