

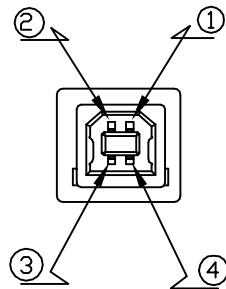
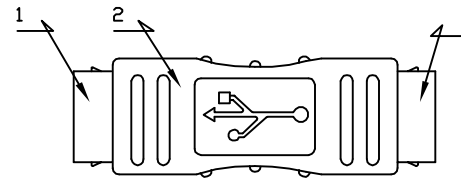



REVISION	DESCREPTION	DATE	APPD
0	SET UP	JUL/03/2001	C.Y.LIN

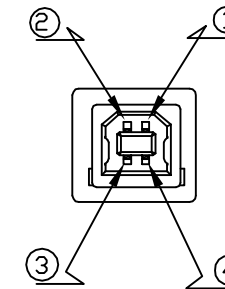

USB-B FEMALE

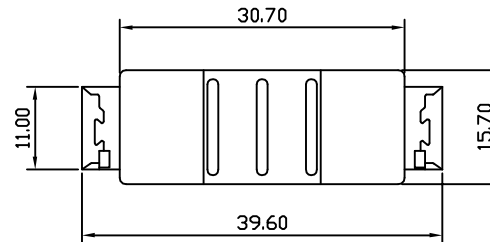

USB-B FEMALE

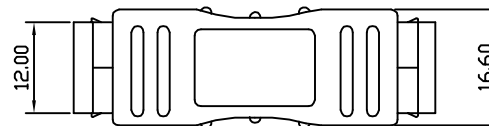

	USB-B FEMALE	1	2	3	4	SHELL
PIN ASSIGNMENT						
	USB-B FEMALE	1	2	3	4	SHELL

ELECTRONIC TEST:
 1.OPEN/SHORT/INTERMITTE:100%.
 2.INSULATION RESISTANCE:10MΩ.
 3.CONTACT RESISTANCE:100Ω.

NO.	DESCRIPTION	UNIT	QTY
4	INTERNAL WIRES:UL1007 30AWG 7STRAND L:17MM	PCS	4
3	USB-B TYPE FEMALE INSULATION:WHITE IN COLOR	PCS	1
2	PVC MOLDED WITH COPPER FOIL BEIGE IN COLOR		
1	USB-B TYPE FEMALE INSULATION:WHITE IN COLOR	PCS	1

TOLERANCE			
SELECT		✓	
DN	TOL	1	2 3
0.000	+/-	0.02	0.05 0.10
0.00	+/-	0.05	0.10 0.15
0.0	+/-	0.10	0.15 0.20
0	+/-	0.15	0.20 1.00
	ANGLE+/-	1.0°	1.0° 15°
MATERIAL:			

HO CHIEN ENTERPRISE CO. LTD

TITLE :

PAGE: 1 OF 1 HO CHIEN P/N. ADP-USB-BFBF

DR: RON CHEN CHK: J.T.CHEN APPD: C.Y.LIN