

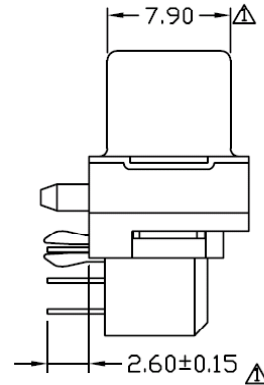
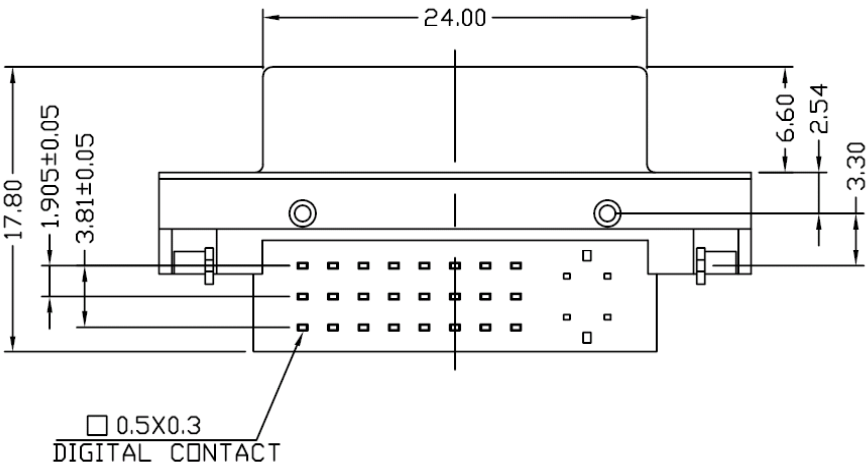


REV.	NOTES	DATE
A	RELEASED	2004/07/05
B	△ 7.70 改為 7.90 , 2.34±0.15 改為 2.60±0.15	2004/07/10

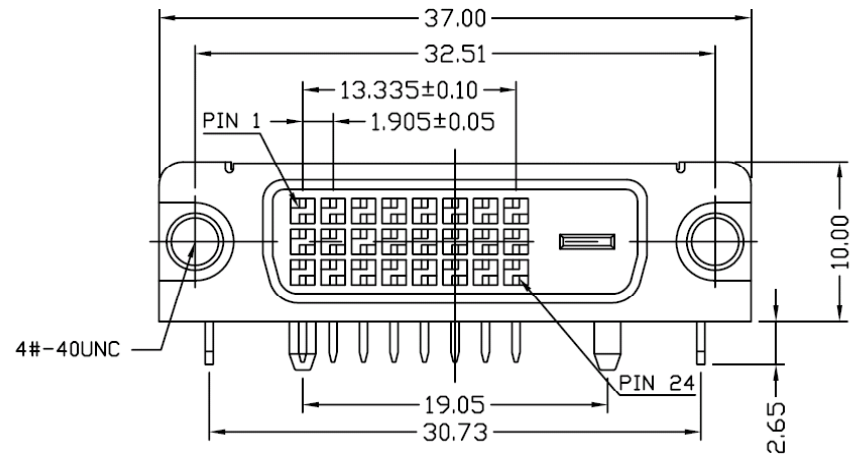

NOTES:

- MATERIALS:
 - INSULATOR: GLASS FIBER REINFORCED THERMOPLASTIC LCP UL94V-0.
 - CONTACT: PHOSPHOR BRONZE, GOLD FLASH ON CONTACT, TIN PLATED ON TAIL 100μ", OVER NICKEL PLATED 50μ".
 - SHELL: STEEL, NICKEL PLATED.
 - BOARDLOCK: BRASS, TIN PLATED.
 - RIVET: BRASS, NICKEL PLATED.
- ELECTRICAL:
 - INSULATION RESISTANCE: 1000 MEGOHMS MINIMUM
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
 - VOLTAGE RATING: 40 VOLTS AC(RMS) MAXIMUM
 - CURRENT RATING: 3.0 AMPS PER CIRCUIT
 - CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM
- MECHANICAL PERFORMANCE:
 - MATING FORCES: 4.5kgf MAXIMUM
 - UNMATING FORCES: 1kgf MINIMUM, 4kgf MAXIMUM
 - DURABILITY: 100 CYCLES MINIMUM
- ENVIRONMENTAL:
 - TEMPERATURE RANGE: -20°C TO +85°C

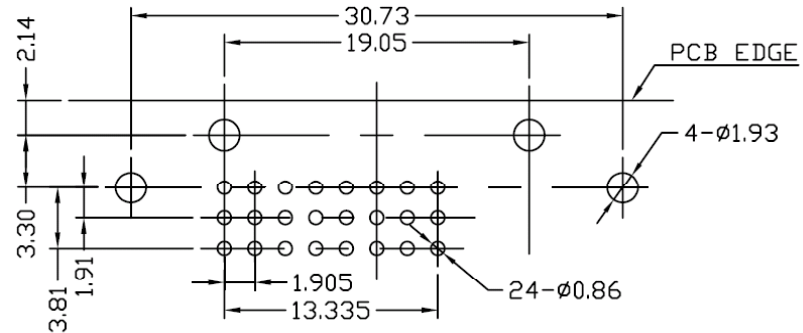

PCB LAYOUT (BOTTOM VIEW) TOLARANCE: ±0.05

單位(UNITS)	mm
數量(QTY)	N/A
材料(MTL)	SEE NOTE
處理(FINISH)	SEE NOTE
繪圖(DRAW)	向宏斌
設計(DE'N)	
審校(CH'K)	
核准(APP'D)	

DIMENSIONS TOLERANCE	
METRIC	
.0=	± .38
.00=	± .25
.000=	± .XXX
.0000=	±
ANG.=	± 2°

<h1>HO CHIEN</h1> <p>www.hochien.com</p>			
		圖名(NAME)	
DVI 24PIN		料號(PART NUMBER)	
		AVI-10240-28B1	
		圖號(DRAW NUMBER)	
		RAVI1024028B1	
		圖檔(FILE NAME .DWG)	
		E:GCT/A/VI	
比例(SCALE)	1/1	圖紙(SIZE)	A4
頁次(SHEET)	1	版次(REV.)	B