
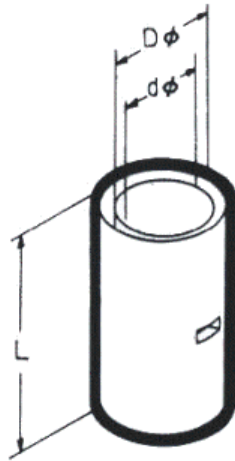


HO CHIEN

BUTT CONNECTORS B型中間套管

TERMINAL MATERIAL : COPPER TUBE

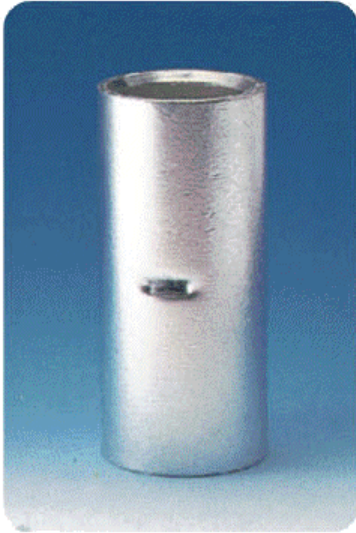

Manufactured from soft drawn pure copper tube to JIS-H3300, C 1020T-0 (Oxygen-Free Copper) which gives the best properties possible.

A complete range butt connectors, ranging from 1.25mm to 325mm.

| ITEM NO. | DIMENSIONS | | | WIRE RANGE | | | AWG |
|----------|------------|------|------|-------------|-----------------------|--|------------|
| | L | D φ | d φ | Single mm | Twine mm ² | | |
| B-1.25 | 16.5 | 3.3 | 1.9 | 0.57~1.44 | 0.25~1.65 | | 22~16 |
| B-2 | 16.5 | 4.0 | 2.6 | 1.44~1.82 | 1.04~2.63 | | 16~14 |
| B-3.5 | 16.5 | 5.0 | 3.6 | 1.82~2.89 | 1.65~4.17 | | 14~12 |
| B-5.5 | 16.5 | 5.5 | 3.7 | 1.82~2.89 | 2.63~6.64 | | 12~10 |
| B-8 | 22.5 | 7.1 | 5.1 | 2.89~3.65 | 6.64~10.52 | | 8 |
| B-14 | 27.5 | 9.0 | 6.4 | 3.65~4.62 | 10.52~16.78 | | 6 |
| B-22 | 30.5 | 11.4 | 8.2 | 4.62~5.81 | 16.78~26.66 | | 4 |
| B-38 | 33.5 | 13.3 | 10.1 | 5.81~7.34 | 26.66~42.42 | | 2 |
| B-60 | 36.0 | 15.4 | 12.0 | 7.34~8.26 | 42.42~60.57 | | 1/0 |
| B-70 | 37.8 | 17.4 | 14.0 | 8.26~9.27 | 60.57~76.28 | | 2/0 |
| B-80 | 39.5 | 19.4 | 15.4 | 9.27~10.41 | 76.28~96.3 | | 3/0 |
| B-100 | 39.5 | 22.0 | 17.6 | 10.41~11.68 | 96.3~117.2 | | 4/0 |
| B-125 | 43.4 | 24.1 | 19.2 | 10.01~12.7 | 107.2~130.4 | | 4/0 |
| B-150 | 55.5 | 26.0 | 20.9 | 11.68~13.8 | 117~152.05 | | 250~300MCM |
| B-180 | 58.5 | 28.6 | 22.0 | 13.8~15.6 | 152.05~192.6 | | 300~350MCM |
| B-200 | 64.5 | 32.5 | 25.7 | 15.6~17.5 | 192.6~242.2 | | 400MCM |
| B-250 | 64.5 | 32.5 | 25.7 | 15.6~17.5 | 192.6~242.2 | | 400MCM |
| B-325 | 73.5 | 37.0 | 29.0 | 17.5~20.3 | 242.27~325 | | 500~600MCM |

INSULATED BUTT CONNECTORS 絕緣中間套管

TERMINAL MATERIAL : COPPER INSULATION MATERIAL : VINYL&NYLON



| ITEM NO. | DIMENSIONS | | | | WIRE RANGE | | | COLOR |
|----------|------------|-----|------|------|------------|-----------------------|-------|--------|
| | d φ | D φ | L | ℓ | Single mm | Twine mm ² | AWG | |
| BF1.25LP | 1.8 | 4.0 | 22.7 | 15.0 | 0.57~1.44 | 0.75~1.25 | 22~16 | RED |
| BF2LP | 2.3 | 4.5 | 22.7 | 15.0 | 1.44~1.82 | 1.25~2.0 | 16~14 | BLUE |
| BF5.5LP | 3.5 | 6.8 | 26.7 | 15.0 | 1.82~2.98 | 2.64~6.64 | 12~10 | YELLOW |
| BF1.25 | 1.8 | 4.0 | 22.7 | 15.0 | 0.57~1.44 | 0.75~1.25 | 22~16 | RED |
| BF2 | 2.3 | 4.5 | 22.7 | 15.0 | 1.44~1.82 | 1.25~2.0 | 16~14 | BLUE |
| BF5.5 | 3.5 | 6.8 | 26.7 | 15.0 | 1.82~2.98 | 2.64~6.64 | 12~10 | YELLOW |
| BF8 | 5.1 | 8.5 | 35.8 | 19.2 | 2.89~3.65 | 6.64~10.52 | 8 | RED |

