

DIN SOCKET / DIN SOCKET, METAL COVER TYPE (4PIN~8PIN)


SPECIFICATION

Insulation Resistance : 100M OHM MIN at 500V D.C.


Dielectric Strength : 1000V A.C. for one minute

Contact Resistance : 20m OHM MAX

Rating : 100V A.C. 2A

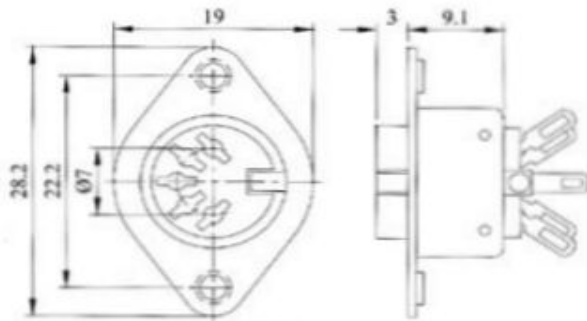

SOLDER TYPE
DS-074-DS-078

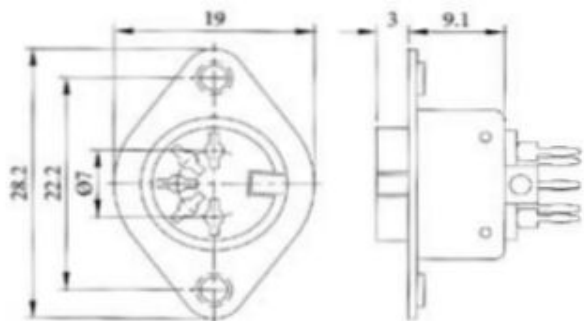

PCB TYPE
DS-074-P~DS-078-P

SOLDER TYPE					
ARRANGEMENT OF CONTACTS					
MODEL NO.	DS-074	DS-075	DS-076	DS-077	DS-078

PCB TYPE					
ARRANGEMENT OF CONTACTS					
MODEL NO.	DS-074-P	DS-075-P	DS-076-P	DS-077-P	DS-078-P
HOLE LAYOUT					