






**SPECIFICATION :**

**1. Electrical Char.**


- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

**2. Physical char.**

- Housing (Option) :
  - PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C
  - Nylon (UL 94V-0), Soldering Temperature:260°C
- Color : Black Color
- Spring Wire:
  - 0.45mm Dia. Phosphor bronze Gold Plating Over Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.

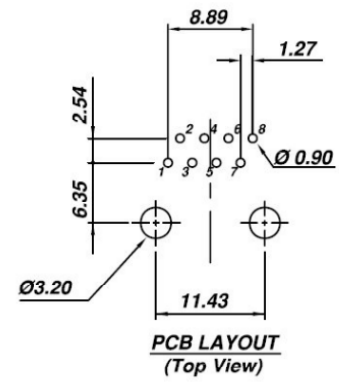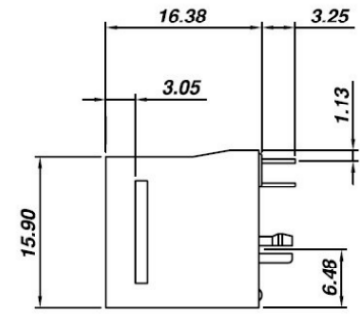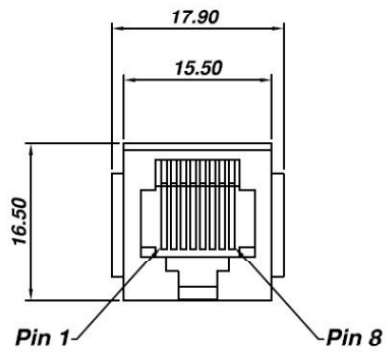

**HC-012-8-F-XX**

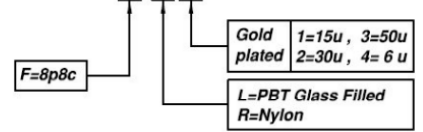

**HO CHIEN**  
[www.hochien.com](http://www.hochien.com)

TITLE	<b>RJ45 TOP ENTRY PCB JACK UL &amp; cUL FILE NO. E131820</b>
	<b>MODULAR JACKS ASSY FOR HC-012-8-F-XX</b>
	<b>SCALE SIZE DWG. NO. 9628 SERIES</b>

DWG. NO. **AST012005-3**

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR	MM INCH	00±0.01 000±0.005 0000±0.002	Steven CK'D	DEC-03 '07
	ANGLE +0°30'	RADIL	+0.45 -0.15	John APP'D	DEC-03 '07
				Billy	DEC-03 '07