





SPECIFICATION :

1. Electrical Char.


- Insulation Resistance :** 500M-Ohm Min.
- Contact Resistance :** 20milli-Ohm Max.
- Rating Current :** 1.5A Max.
- Rating Voltage :** 120V AC.
- Dielectric Voltage :** 1,000 Vrms 60 Sec. Min.

2. Physical char.

- Housing :** PBT Glass Filled (UL 94V-0)
- Color :** Black Color
- Spring Wire :** 0.35mm Thickness Phosphor Bronze
Gold Plating Over Nickel
- Temperature Range :** - 40°C / +85°C
- Durability :** 500 Mating cycles Min.

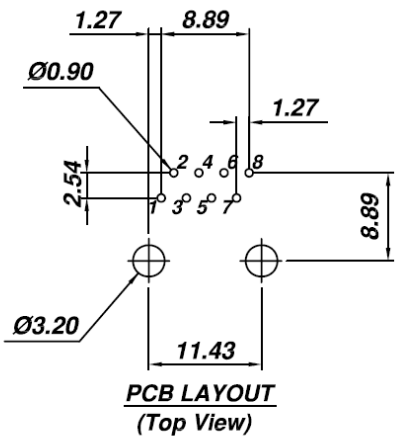

HC-012-9-F-LX



HO CHIEN
www.hochien.com

TITLE	RJ45 TOP ENTRY PCB JACK UL & cUL FILE NO. E131820	
	MODULAR JACKS ASSY FOR HC-012-9-F-LX	
	SCALE SIZE DWG. NO. 9648-1 SERIES	

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. <i>Steven</i>	DATE MAR-01 '06
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00±0.01 000±0.005 0000±0.002	00±0.25 000±0.13 0000±0.05	CK'D <i>John</i>	MAR-01 '06
$\frac{MM}{INCH}$	ANGLE +0°30'	RADIL	+0.45 -0.15	APP'D <i>Billy</i>	MAR-01 '06

DWG. NO. **AS012008-1**