





SPECIFICATION :

1. Electrical Char.


- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

- Housing (Option) :
 - PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C
 - Nylon (UL 94V-0), Soldering Temperature:260°C
- Color : Black Color
- Spring Wire:
 - 0.35mm Thickness Phosphor bronze Gold Plating Over Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.

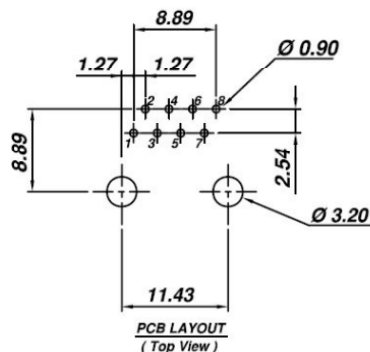

HC-031-8-F-XX-N

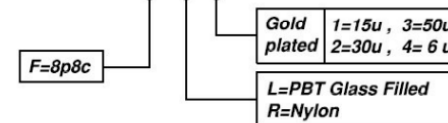

HO CHIEN
www.hochien.com

TITLE

RJ45 Very Low Profile PCB Jack
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
HC-031-8-F-XX-N

SCALE SIZE DWG. NO. 9631-8 SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR	MM INCH	00±0.01 000±0.005 0000±0.002	00±0.25 000±0.13 0000±0.05	Steven FEB-18 '08
	ANGLE +0°30'	RADIL	+0.45 -0.15	John FEB-18 '08	
MM INCH				Billy FEB-18 '08	

DWG. NO. **AST031004-1**