

REVISION	DESCREPTION	DATE	APPD
0	SET UP	OCT/18/2006	C.Y.LIN

**SPECIFICATION :****1. Electrical Char.**

**Insulation Resistance : 500M-Ohm Min.**  
**Contact Resistance : 20milli-Ohm Max.**  
**Rating Current : 1.5A Max.**  
**Rating Voltage : 120V AC.**  
**Dielectric Voltage : 1,000 Vrms 60 Sec. Min.**

**2. Physical char.**





**Housing : PBT Glass Filled (UL 94V-0)**  
**Color : Black Color**  
**Spring Wire : 0.45mm Dia. Phosphor Bronze**  
**Gold Plating Over Nickel**  
**Temperature Range : - 40°C / +85°C**  
**Durability : 500 Mating cycles Min.**

**HC-061-24-F-LX**

Number Of Port

F=8p8c

Gold plated	1=15u, 3=50u 2=30u, 4= 6 u
-------------	-------------------------------

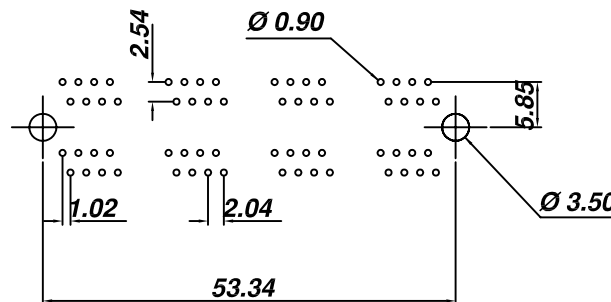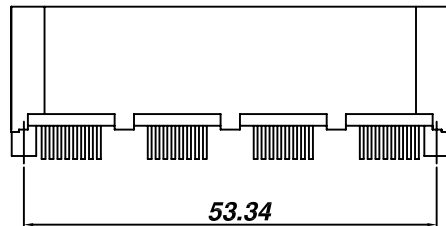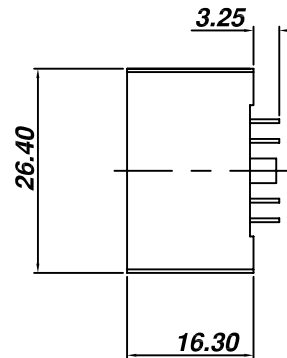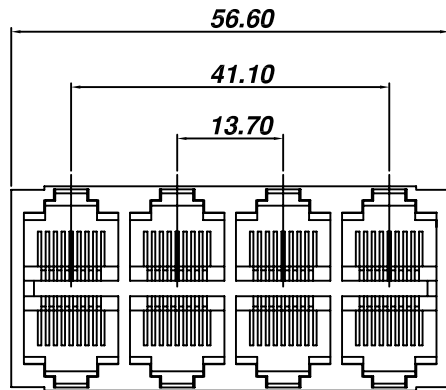

**PCB Layout**  
**(Top View)**



HO CHIEN ENTERPRISE CO. LTD

TITLE : RJ45 2X4 8 POSITIONS  
DOUBLE DECK GANG JACK

DR: RON CHEN    CHK: J.T.CHEN    APPD: C.Y.LIN

PAGE: 1 OF 1    HO CHIEN P/N. HC-061-24-F-LX