


**PBC Layout
(Top View)**



SPECIFICATION :

1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

- Housing : Nylon (UL 94V-0)
- Color : Black Color
- Spring Wire : 0.35mm Thickness Phosphor Bronze
Gold Plating Over Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.

HC-073-8-F-RX



HO CHIEN
www.hochien.com

TITLE
RJ11 or RJ12 TOP ENTRY SMT PCB JACK
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
HC-073-8-F-RX


SCALE SIZE DWG. NO.9738-8 SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. <i>Steven</i>	DATE MAR-01 '06
THIRD ANGLE PROJECTION	LINEAR MM INCH	00±0.01 000±0.005 0000±0.002	00±0.25 000±0.13 0000±0.05	CK'D <i>Johnn</i>	MAR-01 '06
	ANGLE +0°30'	RADIL	+0.45 -0.15	APP'D <i>Billy</i>	MAR-01 '06

DWG. NO. **AS073003-1**

MATERIALS:

- REEL-2mm THICK PLASTIC WHEEL.
- CARRIER-PS (0.40mm THICK TAPE).
- COVER TAPE-PE (0.10mm THICK TAPE).

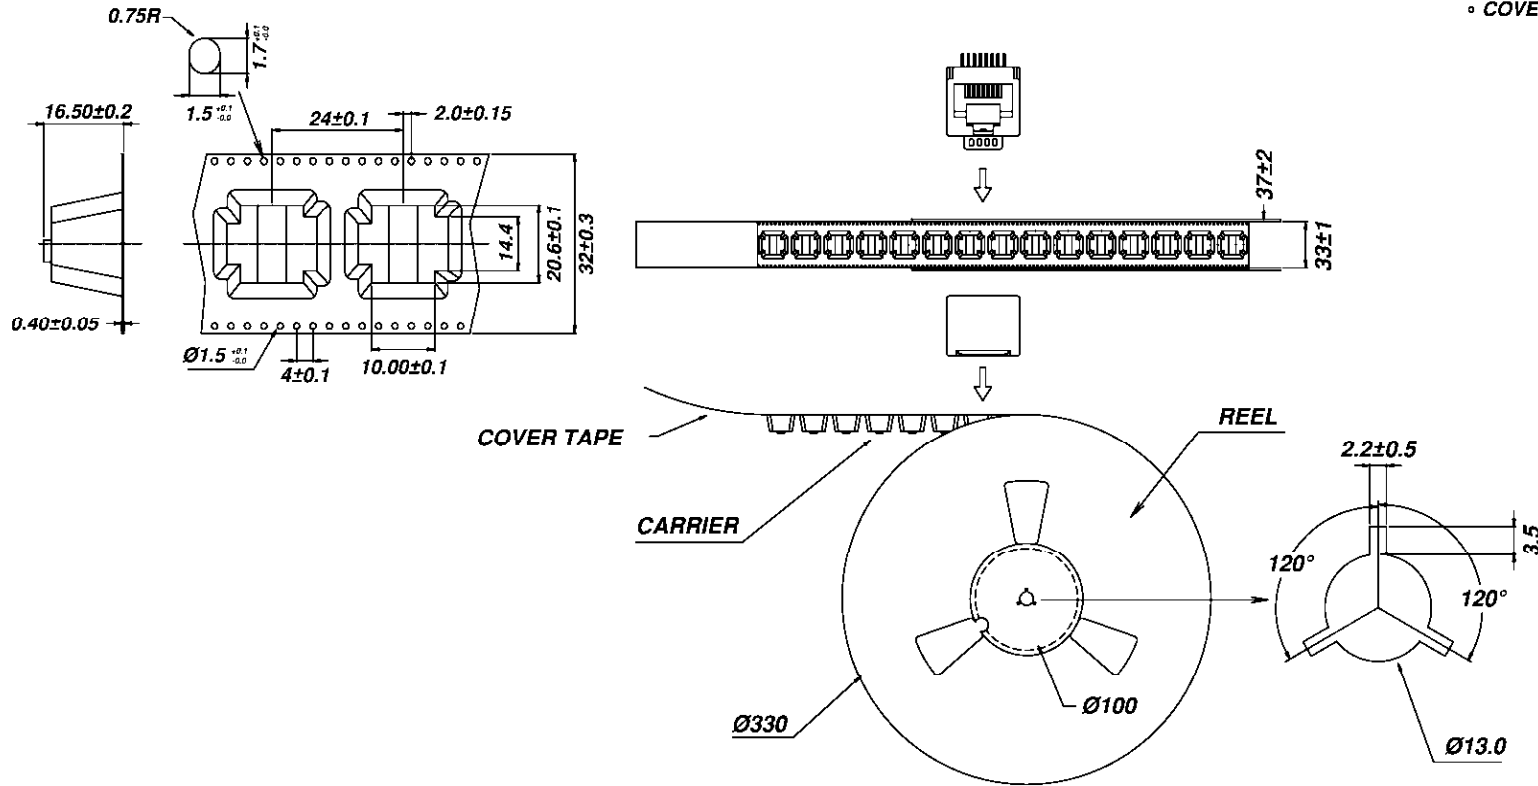

NOTES:

- THE DIRECTION OF JACKS PUT INTO CARRIER.
- 10 EMPTY CAVITIES FOR BOTH OF TOP AND BOTTOM OF THE CARRIER.
- 150 PCS PRODUCTS BE PACKAGED ONE REEL.

HO CHIEN
www.hochien.com

TITLE
TAPE & REEL PACKAGING SPEC.

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
<p>THIRD ANGLE PROJECTION</p>	<p>LINEAR</p> <p>MM INCH</p>	00±0.01	00±0.25	Steven	MAR-01 '06
		000±0.005	000±0.13	Johnn	MAR-01 '06
		0000±0.002	0000±0.05	APP'D Billy	MAR-01 '06
MM INCH	ANGLE +0°30'	RADIL	+0.45 -0.15		

HC-073-8

DWG. NO. **AS073T03**