


DETAIL X

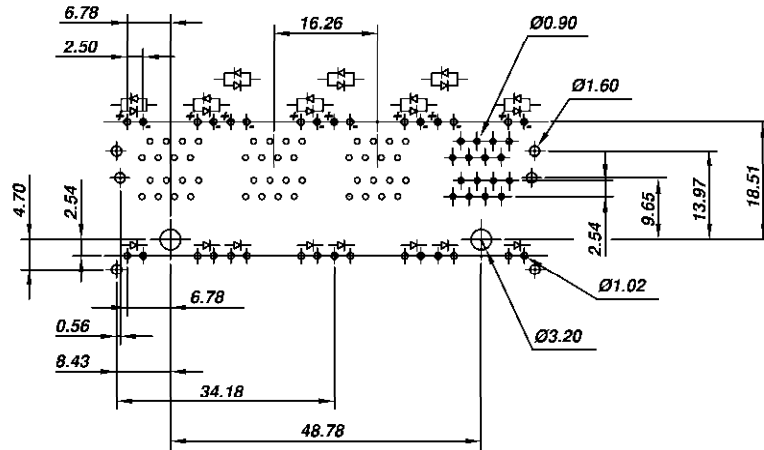

**PC Layout
(Top View)**

SPECIFICATION :

1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

- Housing : PBT Glass Filled (UL 94V-0)
- Color : Black Color
- Spring Wire : 0.46mm Diamete Phosphor Bronz
Gold Plating Over Nickel
- Temperature Range : - 25 /+90 Deg C
- Durability : 500 Mating cycles Min.

3. LED filings.

- Forward DC Current : 2 mA
- Forward Voltage : 1.8 Volts Typical
- Reverse Voltage : 5 Volts Min.

HC-09524FXN4-XX

Number Of Port

F=8p8c

LED 2 Designation : See LED 1

LED 1 Designation :

Gold plated	1=15u, 3=50u 2=30u, 4= 6 u
-------------	-------------------------------

Code	Forward	Reverse	Code	Forward	Reverse
G	Green	—	2	Yellow	Orange
Y	Yellow	—	3	Green	Red
1	Green	Orange	4	Yellow	Red

HO CHIEN

www.hochien.com

TITLE

**RJ45 2X4 8 POSITIONS
DOUBLE DECK GANG SHIELDED JACK
UL & cUL FILE NO. E131820**

**MODULAR JACKS ASSY FOR
HC-09524FXN4-XX**

SCALE SIZE DWG. NO. 9795 SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. Steven	DATE JAN-12 '05
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00±0.01 000±0.005 0000±0.002	00±0.25 000±0.13 0000±0.05	CK'D Johnn	JAN-12 '05
	ANGLE+0°30'	RADIL	+0.45 -0.15	APP'D Billy	JAN-12 '05

DWG. NO.

AS095001