

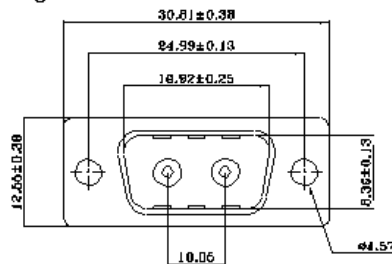



REVISION	DESCRIPTION	DATE	AP
C	SET UP	JUN29/2005	C.Y.

Plug



Receptacle

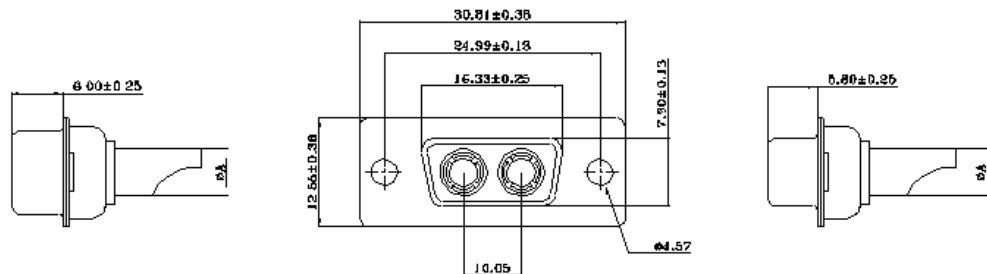

PART NO.		Current Rating	Dimension
Plug	Receptacle		Ø A
1140-22	1141-22	40 AMPS	4.60
1120-22	1121-22	20 AMPS	2.80
1110-22	1111-22	10 AMPS	1.70

DIMPLES ON PLUG ONLY
 CONNECTOR INSULATOR : PBT THERMOPLASTIC,
 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
 HIGH POWER CONTACT MATERIAL: BRASS, 15µ" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING : 10,20,OR40 AMPS
 HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE :
 1000 V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN
 TEMPERATURE RATING : -55°C ~ +125°C



HO CHIEN ENTERPRISE CO. LT

TITLE:

COMB D-SUB 2W2 POWER SOLDER CAP

DR:

RON CHEN

CHK:

J.T.CHEN

APP:

C.Y.LIN

PAGE:

1 OF 1

HO CHIEN P/N.

11XX-22