


.059"(1.5mm) Crimp Terminal Housing

Specifications:



- Current rating: 0.7A AC, DC (AWG #28)
- Voltage rating: 50V AC, DC
- Withstanding voltage: 500V AC/minute
- Insulation resistance: 500M Ω min.
- Contact resistance: Initial value / 20m Ω max.
After environmental testing / 30m Ω max.
- Temperature rise: -25 $^{\circ}$ C ~ 85 $^{\circ}$ C max.
(including temperature rise)

HCA1502-N Series Crimp Terminal Housing

- 2 ~ 13 circuits available
- Material: Nylon 66, UL 94V-0
- Standard color: White
- Accepts 1501T series terminals
- Mates with 1503, 1504, 1505, 1506, 1507 series headers

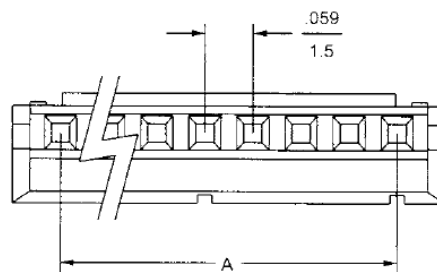

inches
mm

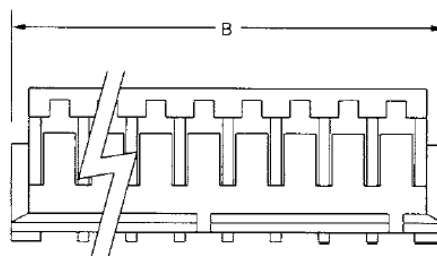

Dimensional Information - in (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	0.059 (1.5)	0.177 (4.5)	6	0.295 (7.5)	0.413 (10.5)	10	0.531 (13.5)	0.650 (16.5)
3	0.118 (3.0)	0.236 (6.0)	7	0.354 (9.0)	0.472 (12.0)	11	0.591 (15.0)	0.709 (18.0)
4	0.177 (4.5)	0.295 (7.5)	8	0.413 (10.5)	0.531 (13.5)	12	0.650 (16.5)	0.768 (19.5)
5	0.236 (6.0)	0.354 (9.0)	9	0.472 (12.0)	0.591 (15.0)	13	0.709 (18.0)	0.827 (21.0)