


Recommended P.C.Board
Layout

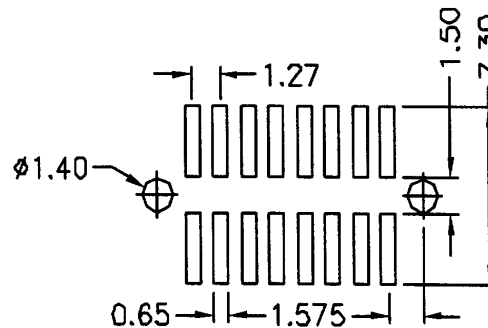

Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T

Ordering Information

PEC244 - XX

X

XX: NO OF PIN PER ROW
03 - 50

T: TIN PLATING
G: GOLD PLATING

HO CHIEN

www.hochien.com

GENERAL TOLERANCE

X' $\pm 5'$.X' \pm
X. $\pm 2'$.X $\pm 0.3\theta$
XX $\pm 1'$.XX ± 0.25
XXX. $\pm 0.5'$.XXX ± 0.13

DRAWN

Z-Y-He

DATE

05-06-02'

DWG. NO.

PEC244

TITLE

1.27 BOX HEADER
DUAL ROWS SMT TYPE
W/POST

CHECK

DATE

APPROVE

DATE

PART NO.

PEC244- XX X

REV.

01

UNIT

mm

SCALE

2.5=1

