


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T

Recommended P.C.Board
 Layout

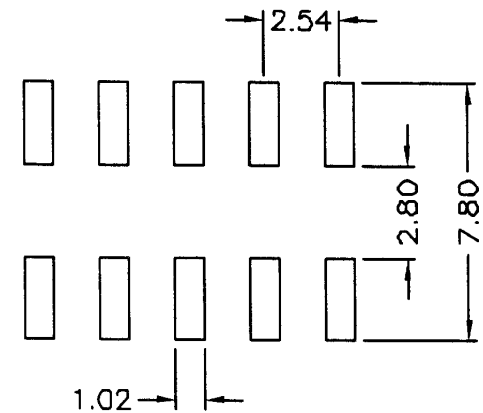

Ordering Information

SCH221 - 2 X __ G

No of Pin
 Per Row

Contact Plating:
 T: TIN PLATING
 G: GOLD FLASH

HO CHIEN
 www.hochien.com

GENERAL TOLERANCE	
X. ± 5'	.X " ±
X. ± 2'	.X ± 0.38
XX. ± 1'	.XX ± 0.25
XXX. ± 0.5'	.XXX ± 0.13

DRAWN C-T-Kang

DATE 3-07-00'

DWG. NO.

SHC221-A01

TITLE
 2.54 FEMALE HEADER
 DUAL ROW S.M.T TYPE
 RASF 7 10

CHECK

DATE

PART NO.

SHC221- XX XX A 01

APPROVE

DATE

REV.

01

UNIT

mm

SCALE

4=1

